

BLU R



5 YEARS WARRANTY



EASY MAINTENANCE



ENAMELLED STEEL TANK



EXTERNAL TEMPERATURE REGULATION



5 BOLTS FLANGE



COMFORT

- External temperature regulation

EFFICIENCY&ENERGY SAVING

- Extra thick polyurethane insulation

QUALITY

- High thickness steel tank tested at 16 bar
- Oversized magnesium anode
- Original Ariston thermostat with built-in safety device
- External thermometer
- Pressure safety valve rated at 8 bar

DESIGN

- Wall-hung



علامة الجودة الإماراتية
Emirates Quality Mark





TECHNICAL DATA

		BLU R 50 V	BLU R 80 V	BLU R 100 V	BLU R 50 H	BLU R 80 H	BLU R 80 H	BLU R 100 H	BLU R 100 H
Nominal Capacity	L	50	80	100	50	80	80	100	100
Power	kW	1.5	1.5	1.5	1.2	1.2	1.5	1.2	1.5
Voltage	V	230	230	230	230	220/240	230	220/240	230
Heating time (T= 45°C)	h.min	1.50	2.56	3.40	2.17	3.16	2.56	4.08	3.40
Max. Working Temp.	°C	75	75	75	75	75	75	75	75
Heat dispersion	kWh/24h	0.96	1.22	1.39	1.02	1.48	1.48	1.65	1.65
Max. Working Pressure	bar	8	8	8	8	8	8	8	8
Weight	kg	17	23	25	17	22	23	26	25
Protection	IP	IPX3	IPX3	IPX3	IPX1	IPX1	IPX1	IPX1	IPX1

OVERALL DIMENSIONS

		BLU R 50 V	BLU R 80 V	BLU R 100 V	BLU R 50 H	BLU R 80 H	BLU R 80 H	BLU R 100 H	BLU R 100 H
a	mm	550	758	913	550	758	758	900	913
b	mm	398	603	758	-	-	-	-	-
c	mm	-	-	-	155	174	174	178	177
d	mm	-	-	-	160	335	335	486	487

CODE	3605199	3605200	3605201	3605202	-	3605203	-	3605204
CODE (UAE)	3626201	3626202	3626203	3626204	3623608	3626205	3626315	3626206

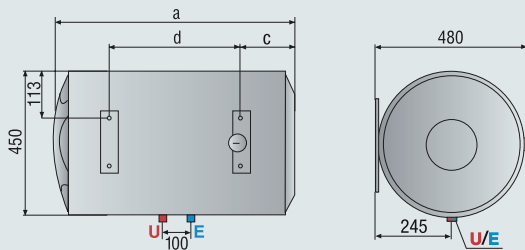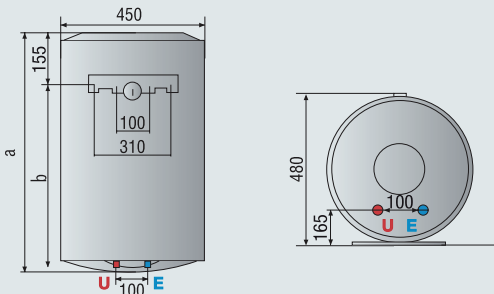

LEGEND
E Cold water inlet G 1/2"
U Hot water outlet G 1/2"

NOTE: The Nominal capacity listed in this catalogue identifies the product category. The actual product capacity is listed in the relative technical documentation.